ViewSonic® VG710s/VG710b LCD Display

17" DigitalMedia Slim Bezel Displays

Multimedia functionality in a space-saving design.

The 17" ViewSonic VG710s and VG710b LCD displays combine a refined slim-bezel design with the quality you have come to expect from ViewSonic. OPTISYNC® TECHNOLOGY supports both digital (DVI) and analog (VGA) signals for added versatility and connectivity. Two built-in 3-WATT SPEAKERS, deliver rich, stereo sound to your desktop. Combine all this with CLEARMOTIV™ BROADCAST-QUALITY VIDEO featuring an ultra-fast 16ms video response time and a 450:1 contrast ratio (typ) and you have the ideal LCD display for home, small/home office, corporate, government or education use.

Award-Winning Company

ViewSonic is the #1 best-selling monitor brand in the USA, delivering price and performance leadership.*

Quality, versatility and connectivity.

- **OPTISYNC digital/analog inputs expand your connectivity**
  Multi-mode input technology supports both digital (DVI) and analog (VGA) signals for ultimate compatibility and configuration flexibility.
- **Multimedia enhanced**
  Save desk and workspace and enjoy rich, stereo sound with two built-in 3-watt stereo speakers.
- **ClearMotiv™ technology**
  Super-fast 16ms video response delivers broadcast-quality full motion video at 62.5 fps.
- **Stylish slim-bezel design**
  The full 17" viewable screen in an ultra-thin bezel lets you see more without taking up valuable desktop real estate.
- **High brightness and contrast**
  250-nit brightness (typ) and 450:1 contrast ratio (typ) for rich, detailed images.
- **Full 17" viewable**
- **1280x1024 resolution**
- **OnView® controls for superior screen adjustability**
  Screen adjustments are precisely made via an easy-to-use on-screen menu.
- **VESA® 100mm wall mount compliant**
- **PC and Mac® compatible**
- **TCO'03 and ENERGY qualified**
  TCO'03 for silver and TCO'99 for black models.

Create a Total Desktop Solution

Add ViewMate® Collection accessories to your display for a complete desk-top solution. Choose stylish mice and wireless keyboards, or turn that display into a TV with a TV/video processor.

ViewSonic®

the choice of professionals

All-in-one

ViewSonic® VG710s/VG710b LCD Display

17" DigitalMedia Slim Bezel Displays

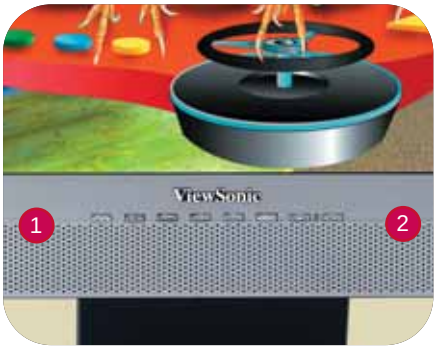

1. *Sleek buttons control all major functions*
2. *Integrated dual stereo 3-watt speakers*
3. *Space-saving slim-line design is only 2.0" thick*
4. *Stylish slim-bezel design*
5. *Compact, multimedia, attractive styling*

Available colors:
Black (VG710b), Black & silver (VG710s).

17.0" MULTIMEDIA LCD DISPLAY WITH ONVIEW® CONTROLS

LCD PANEL	**Type**	17.0" color TFT active matrix SXGA LCD
	Display Area	13.3" horizontal x 10.6" vertical; 17.0" diagonal
	Optimum Resolution	1280x1024
	Contrast Ratio	450:1 (typ)
	Viewing Angles	160° horizontal, 140° vertical @ contrast ratio > 5
	Response Time	16ms (typ)
	Brightness	250 cd/m2 (typ)
	Panel Surface	Anti-glare
VIDEO INPUT	**Analog**	RGB Analog (75 ohms, 0.7 Vp-p)
	Digital	DVI-D (TMDS, 100 ohms)
	Frequency	F_h: 30~82kHz, F_V: 50~85Hz
	Sync	H/V separated (TTL)
COMPATIBILITY	**PC**	VGA up to 1280x1024 non-interlaced
	Mac®**	Power Mac™ G3/G4 up to 1280x1024
CONNECTOR	**Signal**	15-pin mini D-sub, DVI-D
	Audio	3.5mm audio line-in
	Power	DC In, DC to Head
AUDIO	**Speakers**	2x3-watts
	Amplifier	3 watts @1kHz
POWER	**Voltage**	AC 100–240V
	Consumption	36W (typ)
CONTROLS	**Basic**	Power (soft), 1, down, up, 2, mute, volume up, volume down
	OnView®	Auto image adjust, contrast, brightness input select, auto adjust (volume, mute), ViewMatch® color adjust (SRGB, 9300K, 6500K-default, 5400K, 5000K, user color), information (mode, model number, serial number), manual image adjust (H. size, H. position, V. position, fine tune, sharpness), setup menu (language, resolution notice, OSD position, OSD timeout), memory recall
OPERATING CONDITIONS	**Temperature**	32–104°F (0–40°C)
	Humidity	10–90% (non-condensing)
DIMENSIONS (W x H x D)	**Physical**	378mm x 405mm x 177mm (with stand) 14.9" x 16.0" x 7.0" (with stand) 378mm x 405mm x 50mm (without stand) 14.9" x 16.0" x 2.0" (without stand)
WEIGHT	**Net**	11.7 lb. (5.3 kg) with stand
	Gross	17.6 lb. (8.0 kg) with stand
REGULATIONS		UL, cUL, FCC-B, CB report, CE, EPA, NOM, TUV/GS, (covers ISO13406-2 and MPR II), NEMKO, SEMKO, DEMKO, FIMKO, GOST-R, PCBC, VCCI, BSMI, CCC, PSB, C-TICK, ENERGY
POWER MANAGEMENT		Meets TCO'03 (VG710s), TCO'99 (VG710b) and ENERGY standards
PACKAGE CONTENTS		LCD display, AC adapter, power cable, Quick Start Guide, ViewSonic Wizard CD, 15-pin VGA video cable, audio cable
WARRANTY		Three-year limited warranty on parts, labor and backlight

specifications

ISO 9001:2000 FM 40187
ISO 14001:1996 FM 40968

ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by the British Standards Institution.

ViewSonic® the choice of professionals

ViewSonic Corporation • 381 Brea Canyon Road, Walnut, CA 91789
Phone (800) 888-8583 or (909) 444-8888 • In Canada (866) 262-1967 • Fax (909) 839-7922 • SalesInfo@ViewSonic.com • ViewSonic.com

*Leading stand-alone, branded monitor by sales (CRT and LCDs combined; iSuppli/Stanford Resources Monitrak® and Flat Panel Monitrak,® 4Q04 Report) **Adapter may be required. Analog adapter available from ViewSonic. Specifications subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. Corporate names, trademarks stated herein are the property of their respective companies. Copyright © 2005 ViewSonic Corporation. All rights reserved. [12293-00B-01/05] VG710s-1/VG710b-1

For more product information, visit us on the web at ViewSonic.com